


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

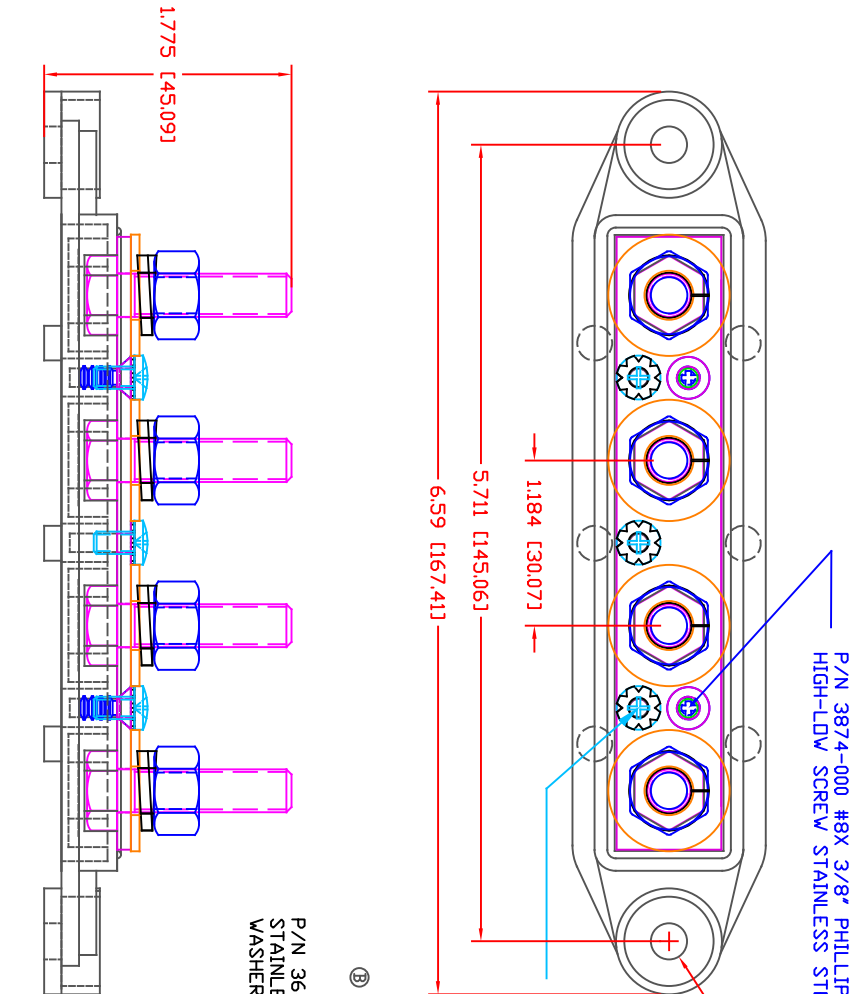

P/N 3874-000 #8X 3/8" PHILLIPS FLAT HEAD HIGH-LDV SCREW, STAINLESS STEEL (2 PLCS)

Ø0.260 [Ø6.601]

344312N02 BASEPLATE

P/N 3870-000 #8-32 X 5/16" SEMS SCREW W/ EXTERNAL TOOTH WASHER (3 PLCS)

P/N 3730-000 5/16"-18 UNC X 1.25" FULLY THREADED STAINLESS STEEL BDLT (4 PLCS)

Ⓑ P/N 3843-008 5/16"-18 HEAVY HEX NUT STAINLESS STEEL (4 PLCS)

P/N 3642-000 STAINLESS STEEL SPRING WASHER (4 PLCS)

P/N 3645-000 18-8 STAINLESS STEEL FLAT WASHER (4 PLCS)

P/N 3885-001 5/16" CONTACT PLATE

1.385 [35.191]

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
UL RATING:

711210502
GLASS FILLED NYLON
HYLON N2015 HL NAT
1.23
515 F [268 C]
UL 94 HB


MAXIMUM RECOMMENDED FASTENER TORQUE: 12 FT./LBS. (144 IN./LBS.)

(IF WARRANTED, DIELECTRIC GREASE CAN BE USED TO PREVENT GALLING)

MAXIMUM RECOMMENDED AMPERAGE: 250 AMPS @ 12VDC

LTR	REVISIONS	DATE	INT.
A	REMOVED BLUE DOT INSTRUCTION	10-21-15	RAS
B	REPLACED P/N 3843-002 WITH P/N 3843-008	03-28-16	RAS
C	UPDATED CURRENT RATING	06-02-16	RAS
D	UPDATED MAXIMUM AMPERAGE RATING	01-30-17	RAS
E	UPDATED "GALLING" STATEMENT	09-18-23	RAS

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±0.30" [±0.8mm]
HARDWARE ITEMS: ±0.10" [±0.25mm]



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF.	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	06-03-10	CHK'D BY:	BRH	
TITLE:	BUSBAR, 4 POINT, 5/16"			SCALE:
MATERIAL:	GLASS-FILLED NYLON			PART NO:
COLOR:	RED	DRG CLASS	REV E	74312N0N02