


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


LTR.	REVISIONS	DATE	INT
A	PN 329NDV14 CHANGED TO PN 329NDN14	6-27-17	MDL
B	3842-006 WAS 3842-003	3-24-17	JMM
C	4.248 WAS 4.280	3-29-17	JMM
D	REMOVED OPTIONAL COVER P/N 335N9P05	5-1-17	JMM

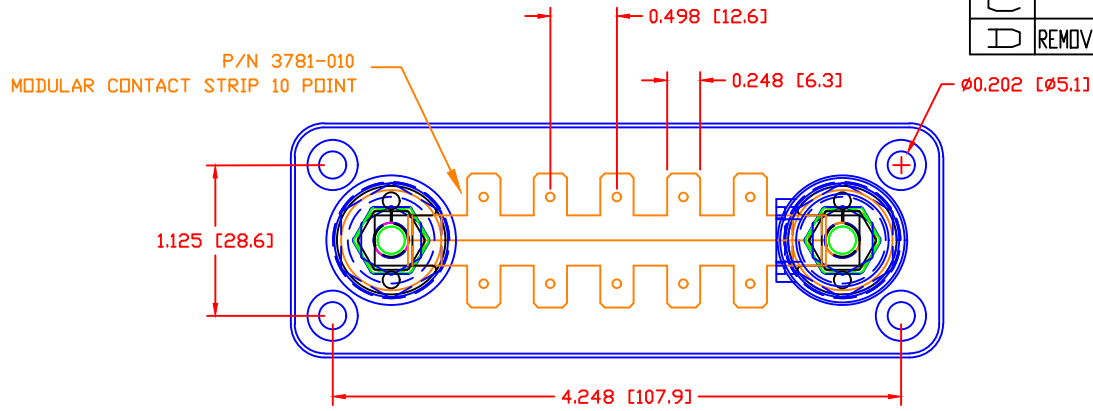

P/N 3736-000 1/4"-20X1.5 HEX HEAD BOLT
STAINLESS STEEL
P/N 3637-000 1/4" SPLIT LOCK WASHER
STAINLESS STEEL

P/N 3644-001 1/4" FLAT WASHER
STAINLESS STEEL
P/N 3644-003 1/4" NICKEL
PLATED BRASS FLAT WASHER

1.714 [43.5]

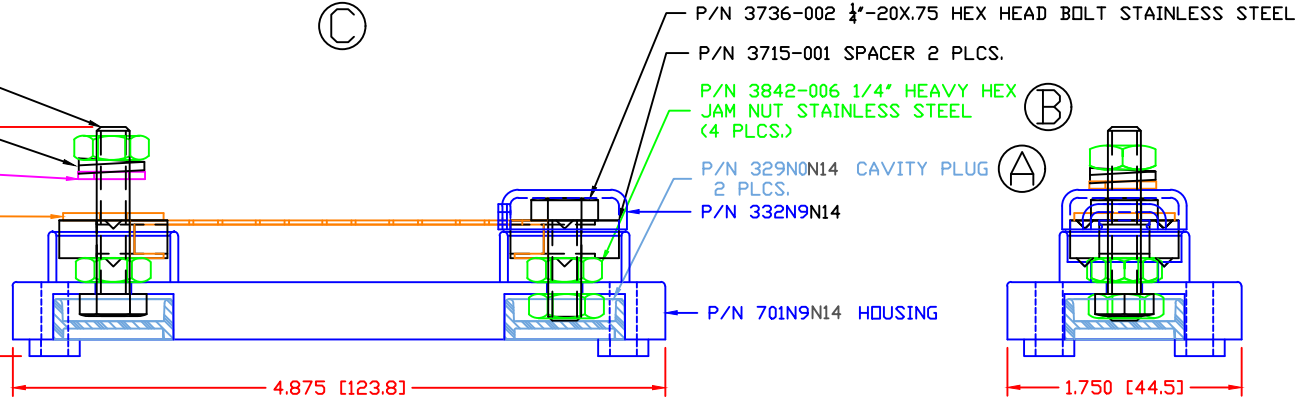

P/N 3736-002 1/4"-20X.75 HEX HEAD BOLT STAINLESS STEEL

P/N 3715-001 SPACER 2 PLCS.

P/N 3842-006 1/4" HEAVY HEX
JAM NUT STAINLESS STEEL
(4 PLCS.)

P/N 329NDN14 CAVITY PLUG
2 PLCS.

P/N 332N9N14

P/N 70IN9N14 HOUSING


1.750 [44.5]

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS ONLY: $\pm 0.30^\circ / \pm 0.8\text{mm}$
HARDWARE ITEMS: $\pm 0.010^\circ / \pm 0.25\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

1111210514UL
GLASS FILLED NYLON
NYLON N2015 HL BK
1.23
515 F [268 C]
UL 94 HB

MAXIMUM RECOMMENDED FASTENER TORQUE: 72 IN-LBS [8.14 Nm]



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE: 21MAY08	DRN BY: BRH CHK'D BY: BRH	WEIGHT: .216LBS [98.00g]
TITLE: BUSBAR, TAB TYPE 10 POINT			SCALE: NONE
MATERIAL: GLASS-FILLED NYLON		PART NO. TTB710N14	
COLOR: BLACK	DRG CLASS REV D		