


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.


LTR.	REVISIONS	DATE	INT.
A	ADDED METRIC IDENTIFICATION METHOD	04-05-11	BRH
B	REMOVED BLUE DOT INSTRUCTION	10-21-15	RAS
C	UPDATED DIMENSIONS AND DESCRIPTIONS	02-02-16	RAS
D	UPDATED CURRENT RATING	06-02-16	RAS
E	UPDATED MAXIMUM AMPERAGE RATING	1-30-17	RAS
F	ADDED FACTORY TORQUE SPEC TO 3874-000	5-23-24	RAS

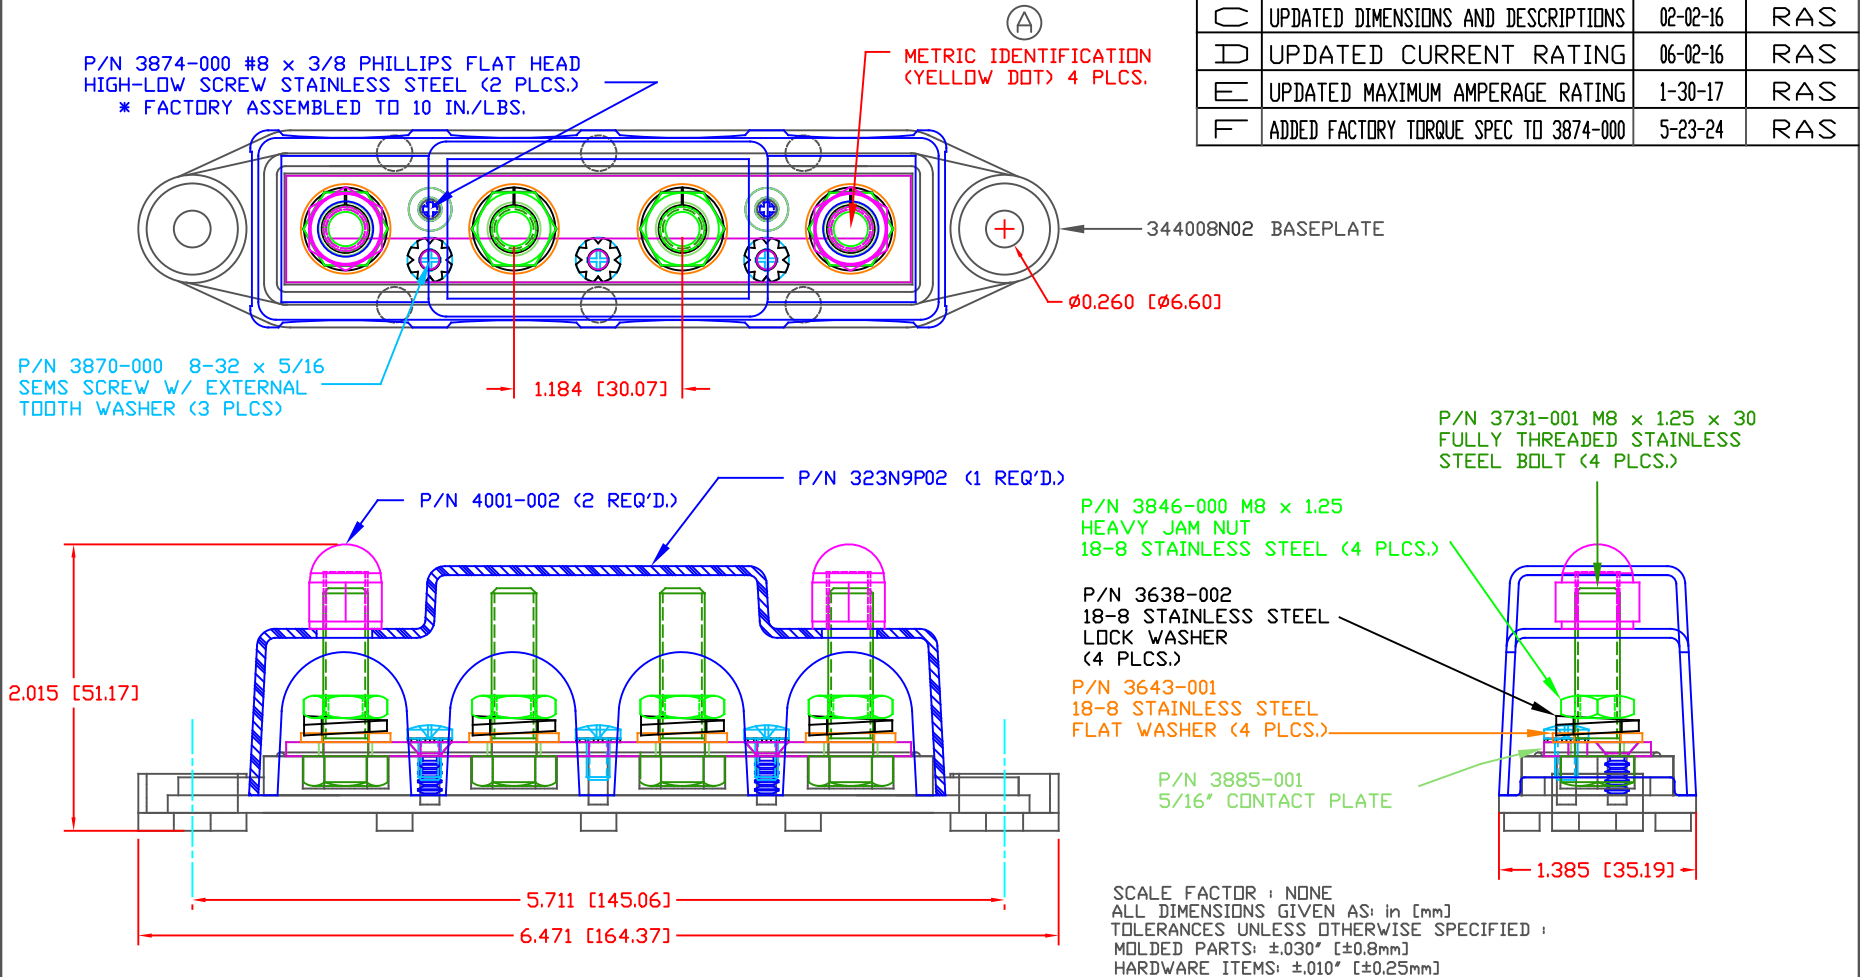

MATERIAL PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: NYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB

INCLUDES COVER P/N 723 AND ASSEMBLY P/N 74008N0
 MAXIMUM RECOMMENDED FASTENER TORQUE: (144 IN./LBS.) [16.2 Nm]
 (ANTI-SEIZE RECOMMENDED)

MAXIMUM RECOMMENDED AMPERAGE: 250 AMPS @ 12VDC



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	08-16-10	CHK'D BY:	BRH	.458LBS [207.80G]
TITLE: BUSBAR, 4 POINT, M8 W/ COVER, RED				SCALE: NONE
MATERIAL: GLASS-FILLED NYLON			PART NO.	
COLOR: RED			74008N1N02	
DRG CLASS: REV F				