THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	UPDATED TORQUE VALUE	7-01-20	EJE
B	3739-008 WAS 3742-017	8-18-21	RAS
C	UPDATED ELECTRICAL VALUES	10-18-21	RAS
D	3742-017 WAS 3739-008	1-3-23	RAS

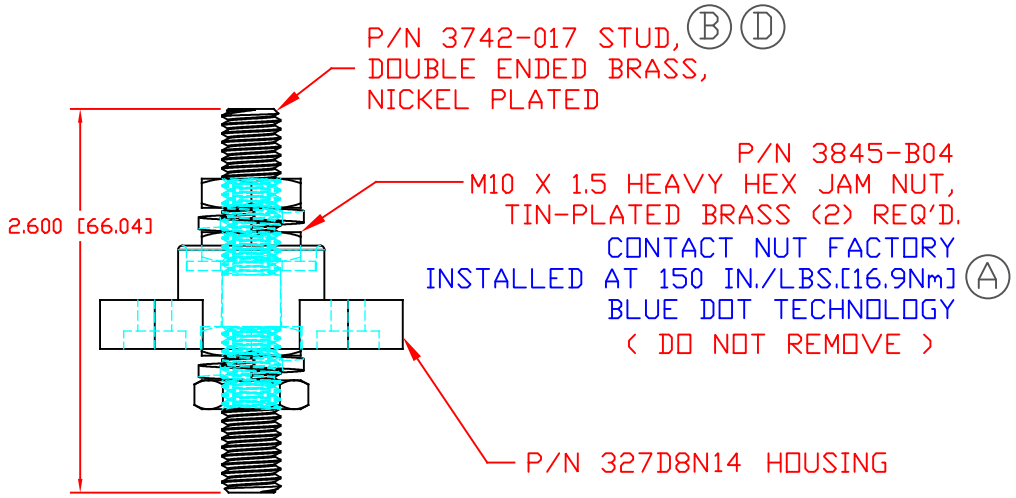

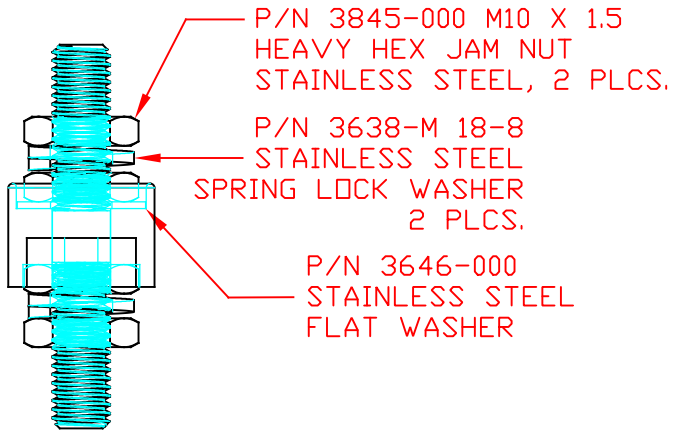

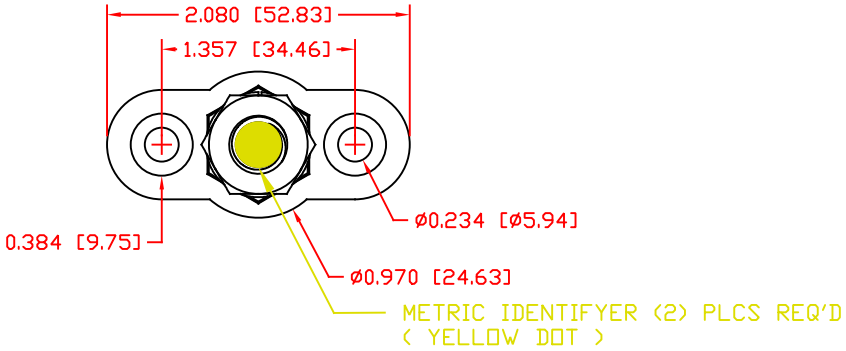

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLORANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO:	1111210514UL
MATERIAL:	GLASS FILLED NYLON
VENDOR PART NO:	HYLON N2015 HL BK
SPECIFIC GRAVITY:	1.23
MELTING TEMP:	515 F [268 C]
U.L. RATING:	UL 94 HB

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

MAXIMUM RECOMMENDED FASTENER TORQUE:	127 IN./LBS. [14.3 Nm]
MAXIMUM AMPERAGE:	375 AMPS AT 12 VDC

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: CUSTOMER DIMS	DATE: 8-18-21	DRN BY: RAS / CHK'D BY: PJK	WEIGHT:
TITLE: M10 PASSTHROUGH JUNCTION STUD			
MATERIAL: GLASS FILLED NYLON		PART NO. 77210N14	
COLOR: BLACK	DRG CLASS REV D		