


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISI□NS	DATE	INT.
\triangle	REDRAVN AND UPDATED (DRIGINAL DRAVING 7-25-14)	6-04-19	RAS

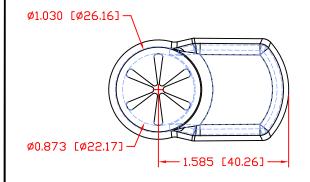



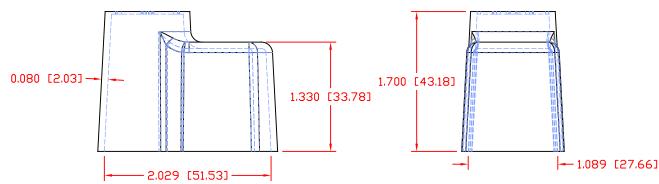

SCALE FACTOR : NONE ALL DIMENSIONS GIVEN AS: in [mm] TOLERANCES UNLESS OTHERWISE SPECIFIED : MOLDED PARTS: ±.030" [±0.8mm] ALL ANGLES ARE ± 1 DEGREE

CLASS

MATERIAL PART NO: MATERIAL: VENDOR PART NO: SHORE DUROMETER: SPECIFIC GRAVITY: ULT. ELONGATION %: MELTING TEMP: BRITTLE TEMP: TENSILE STRENGTH PSI: DIELECTRIC STRENGTH, V./mil U.L. RATING:

1101650102 PVC 9812-65-RED 683 "A" 10 SEC, 65 1.34 400 315-335 F [157-168 C] -54 F [-48 C] 1550 PSI 511 Λ5



VTE Incorporated 5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000

REF: DATE: DRN BY: RAS WEIGHT: 6-04-19 CUSTOMER DIMS CHK'D BY: PJK

TITLE: BATTERY TERMINAL INSULATOR PART NO. MATERIAL: PVC 967N9V02 DRG COLOR: RED REV A