


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

LTR.	REVISIONS	DATE	INT.
A	ADDED TORQUE TAG	12-29-15	RAS
B	3844-012 WAS 3844-003	11-04-16	JMM
C	UPDATED TORQUE VALUES FROM 180 IN-LBS [20.34 Nm]	2-09-18	RAS
D	REDRAWN AND UPDATED	12-20-18	RAS
E	HEX COUPLING NUT TORQUE VALUE ADDED	09-03-20	EJE

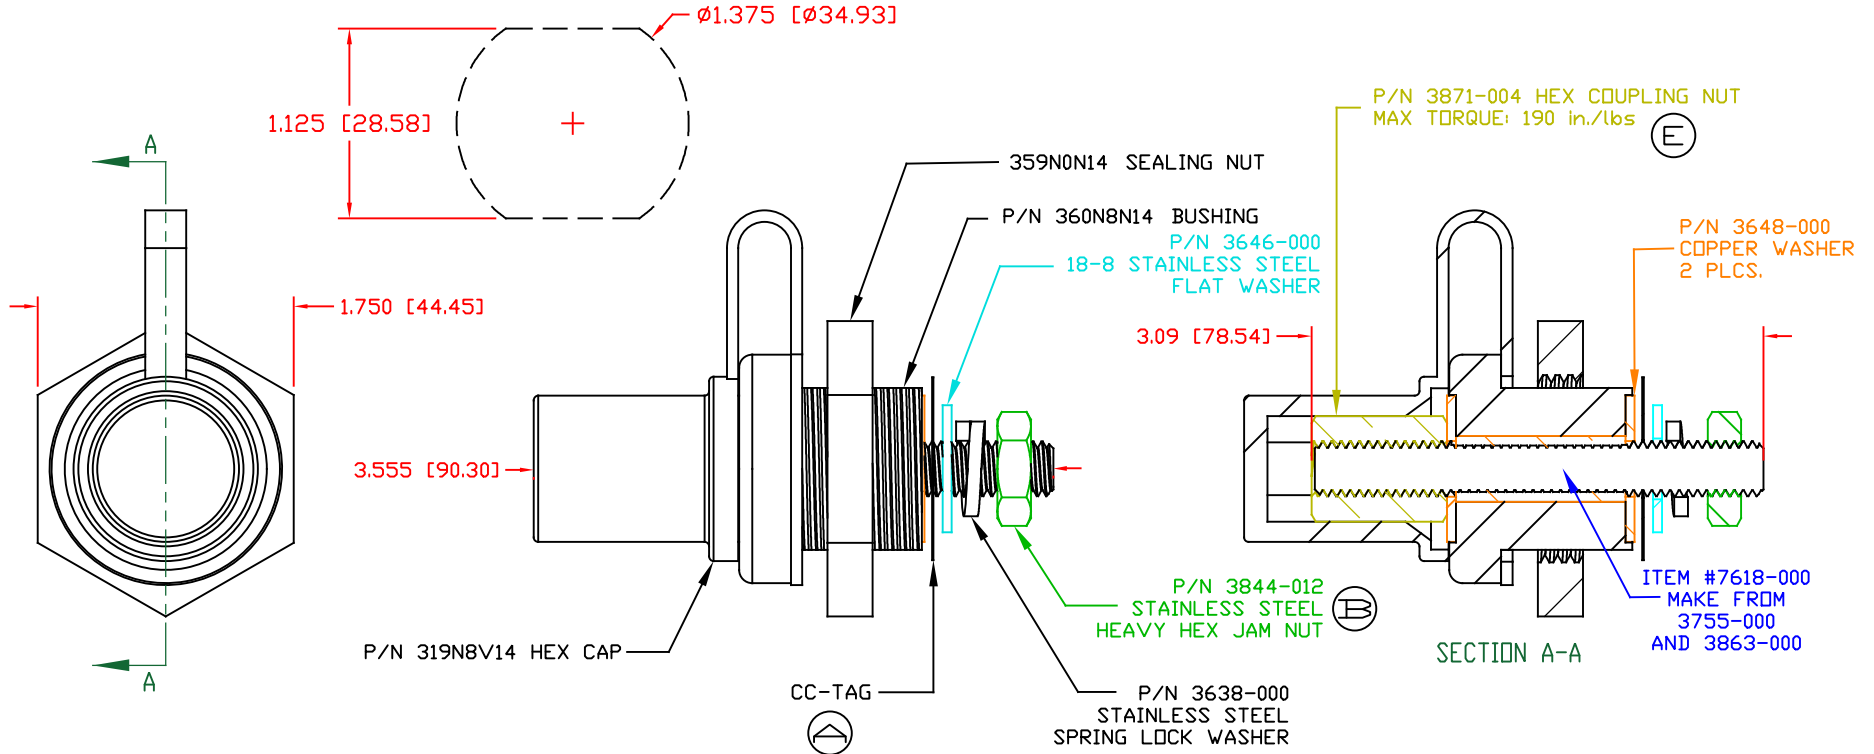


MAXIMUM FASTENER TORQUES:
 (C) JAM NUTS: 212 IN-LBS [24.0 Nm]
 SEALING NUT: 120 IN-LBS [13.56 Nm]

MATERIAL PART NO: 111210514UL
 MATERIAL: GLASS FILLED NYLON
 HYLON N2015 HL BK
 VENDOR PART NO: 1.23
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB

CURRENT CARRYING CAPACITY: 350 AMPS @ 12VDC

SCALE FACTOR: NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: CUSTOMER DIMS	DATE: 12-20-18
		CHK'D BY: PJK	
TITLE: 3/8"-16 POWER BUSHING JUMPER COPPER CORE 350 AMP			
MATERIAL: GLASS FILLED NYLON		PART NO.	
COLOR: BLACK		CCJB376N0N14	
DRG CLASS		REV E	